

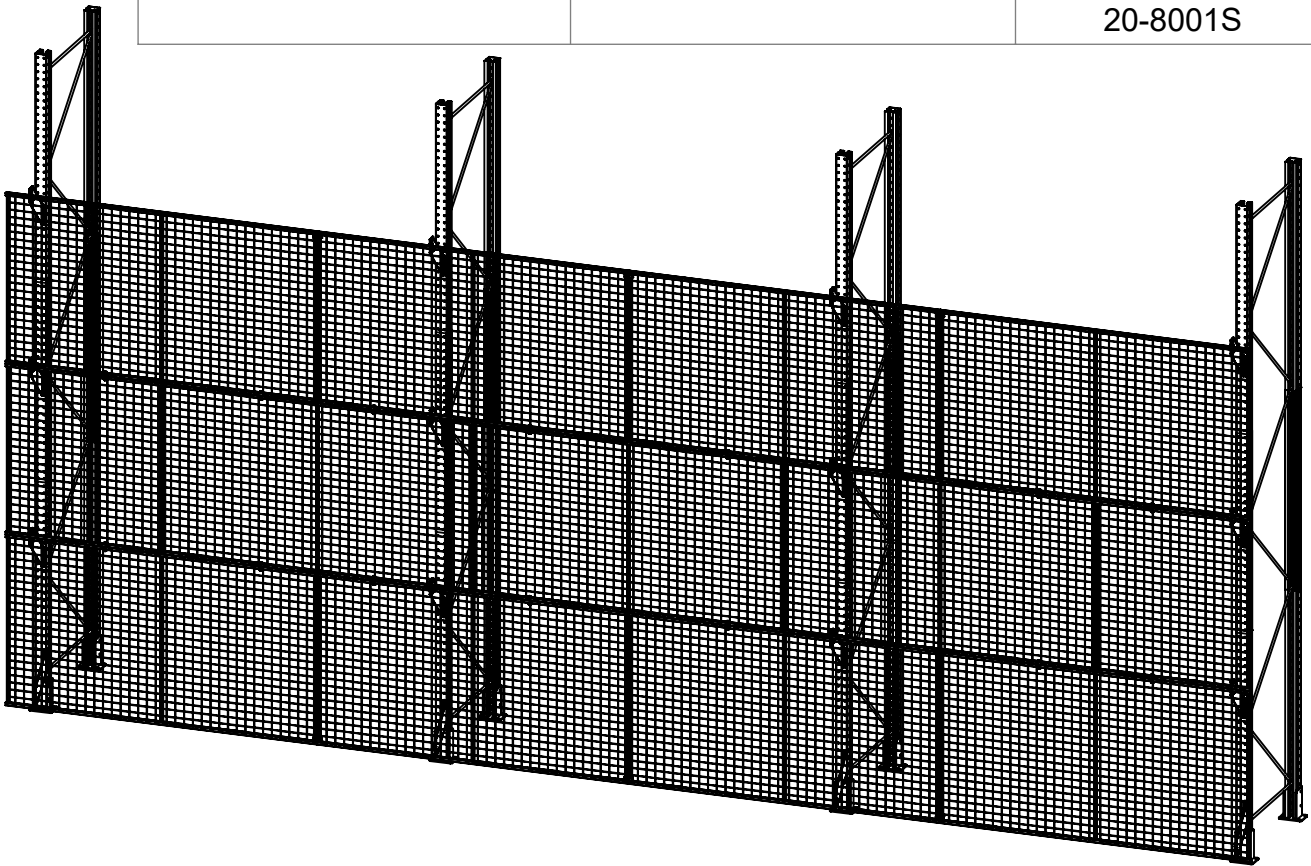



SafeStore Assembly Guide

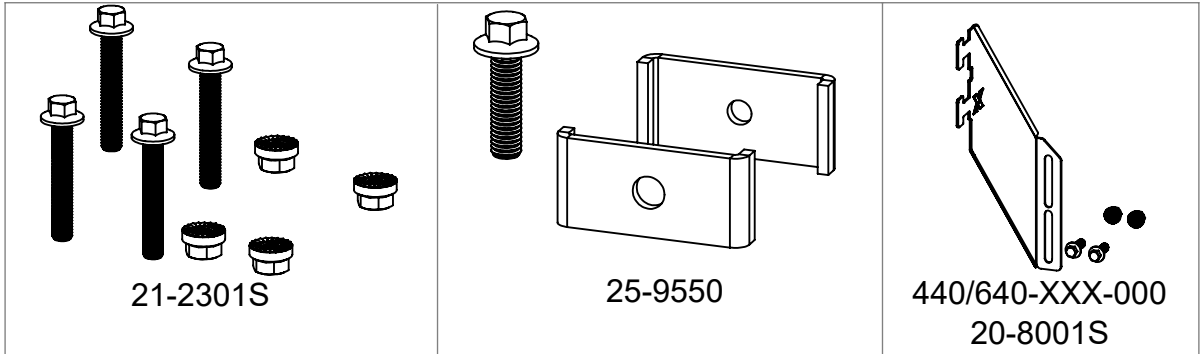


Date: 2022-11-25	C-number (for internal use) C-0004591-01	Version C.2	<p>Axelent AB</p> <p>BOX 1 · KÄVVSJÖVÄGEN 17 SE-335 73 · HILLERSTORP SWEDEN</p> <p>TEL +46 (0)370-37 37 30 INFO@AXELENT.SE AXELENT.COM</p>	<p>BG инструкции за монтаж CZ Montážní návod DE Montageanleitung DK Monteringsvejledning EE Paigaldusjuhendid ES Instrucciones de montaje FI Kokoamisohje FR Les instructions d'assemblage GR οδηγίες συναρμολόγησης HU Összeszerelési utasítások IE Treoracha cóimeála IT Istruzioni di montaggio</p>	<p>LT Montavimo instrukcijos LV Montāžas instrukcijas MT Istruzzjonijiet għall-immuntar NL Montage-instructies PL Instrukcje składowania PT Instruções de montagem RO Instrucțiunile de asamblare SE Monteringsanvisningar SI Navodila za montažo SK Návod na montáž UK Assembly guide</p>

Art No.	X(mm)
413/312-100110	1000
413/312-120110	1200
413/312-150110	1500
413/312-100220	1000
413/312-120220	1200
413/312-150220	1500
Art No.	Mesh Size
413-XXXXXX	50x60
312-XXXXXX	50x30


312-XXX220

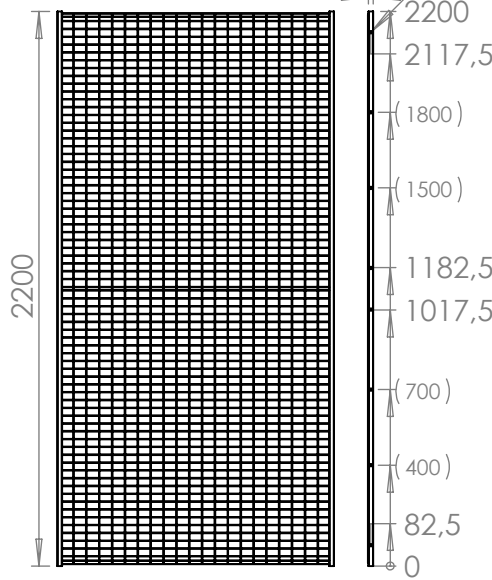


413-XXX220

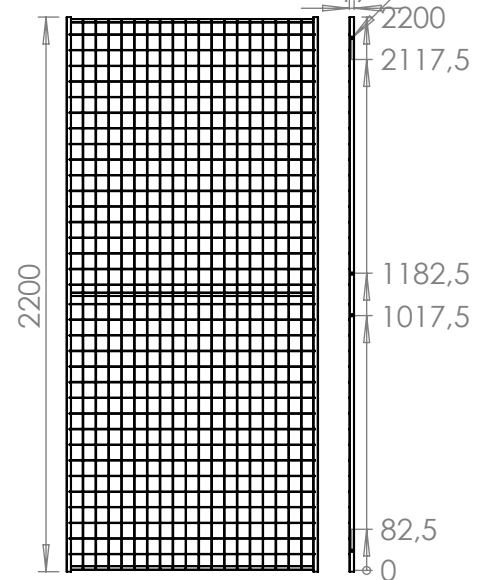



413/312-XXX110

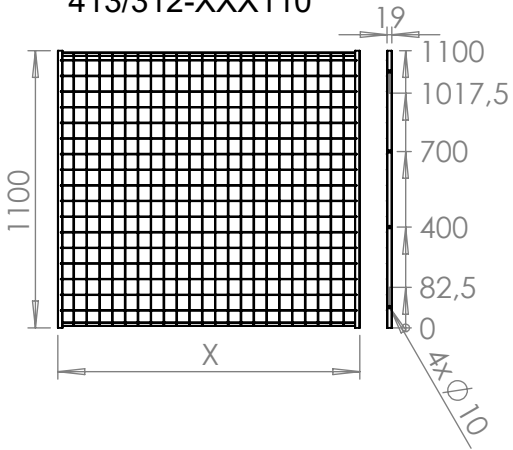





Max recommendation


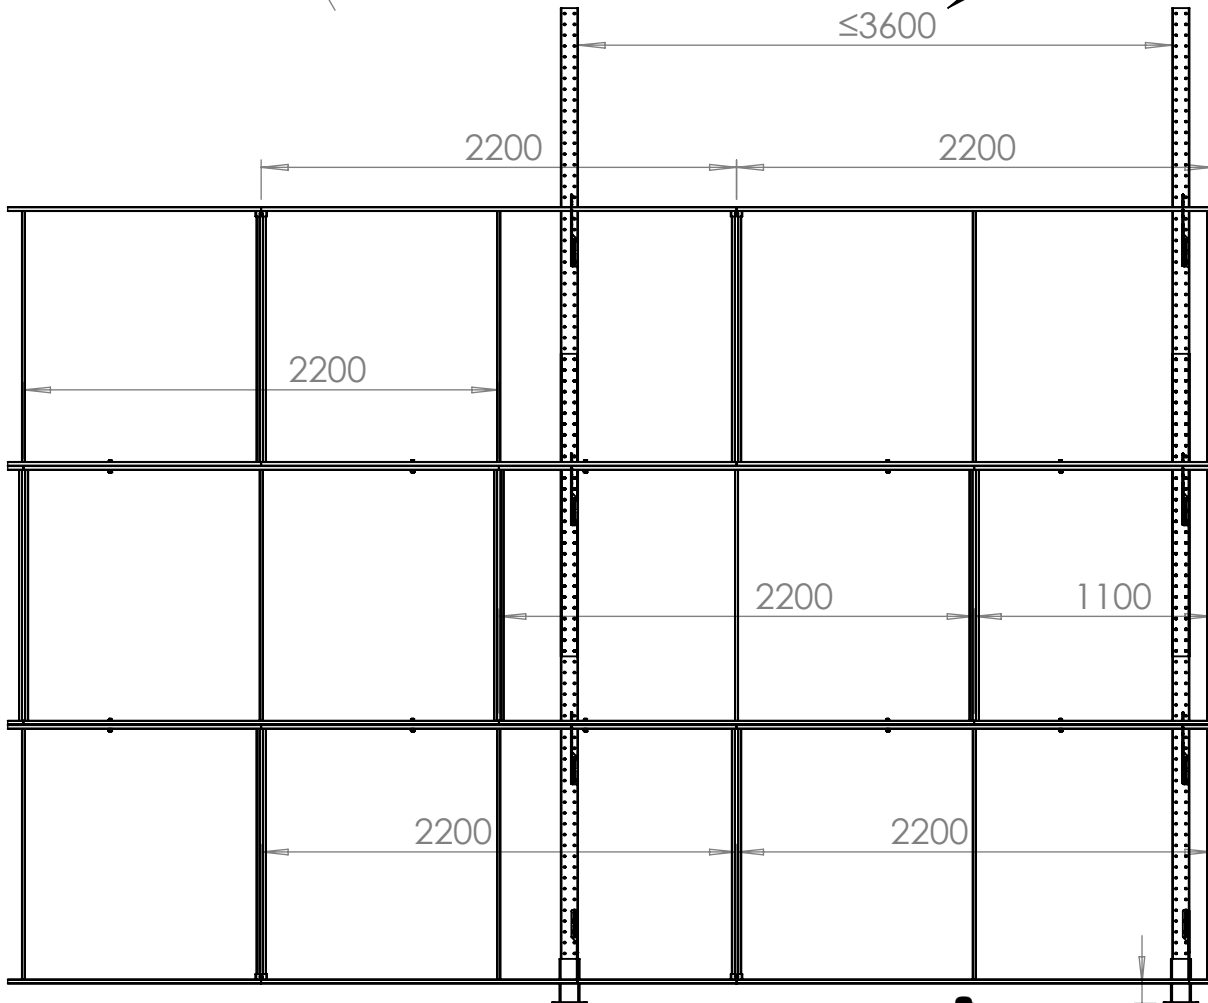





① ! 0-X mm

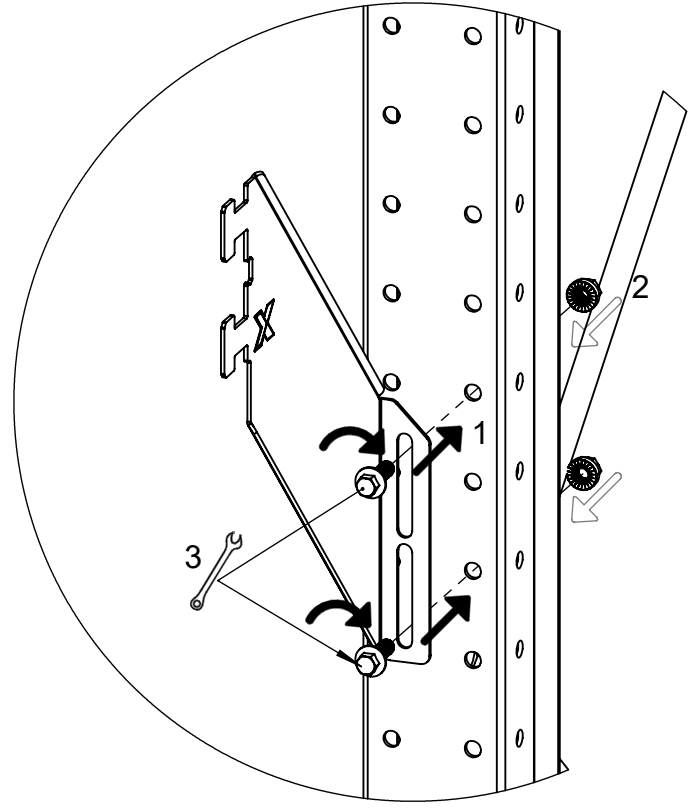
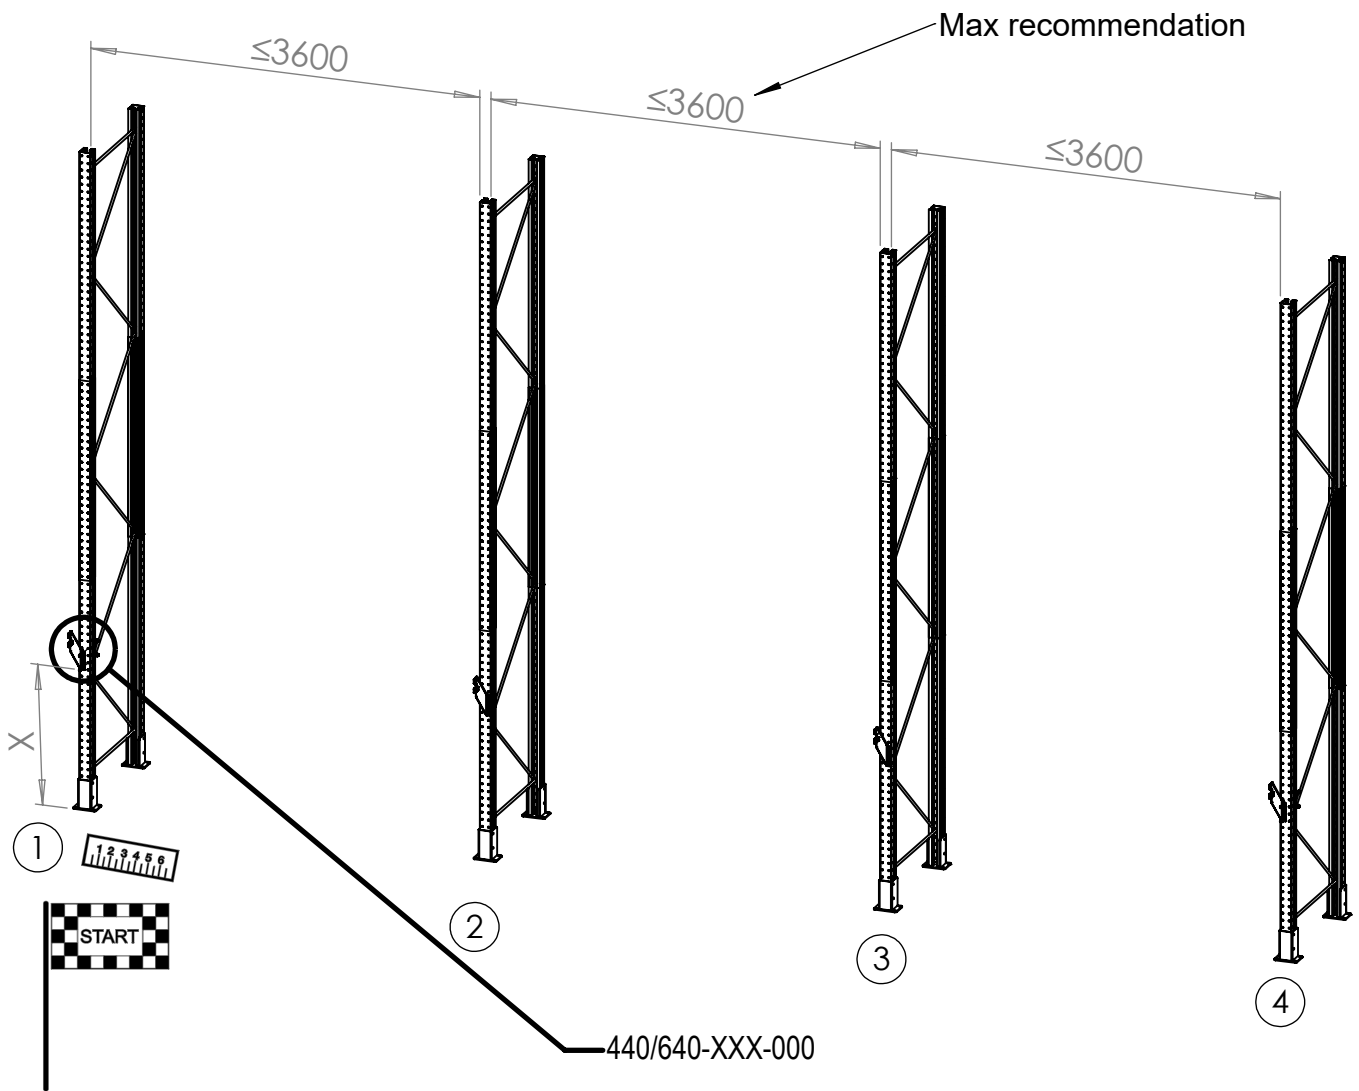


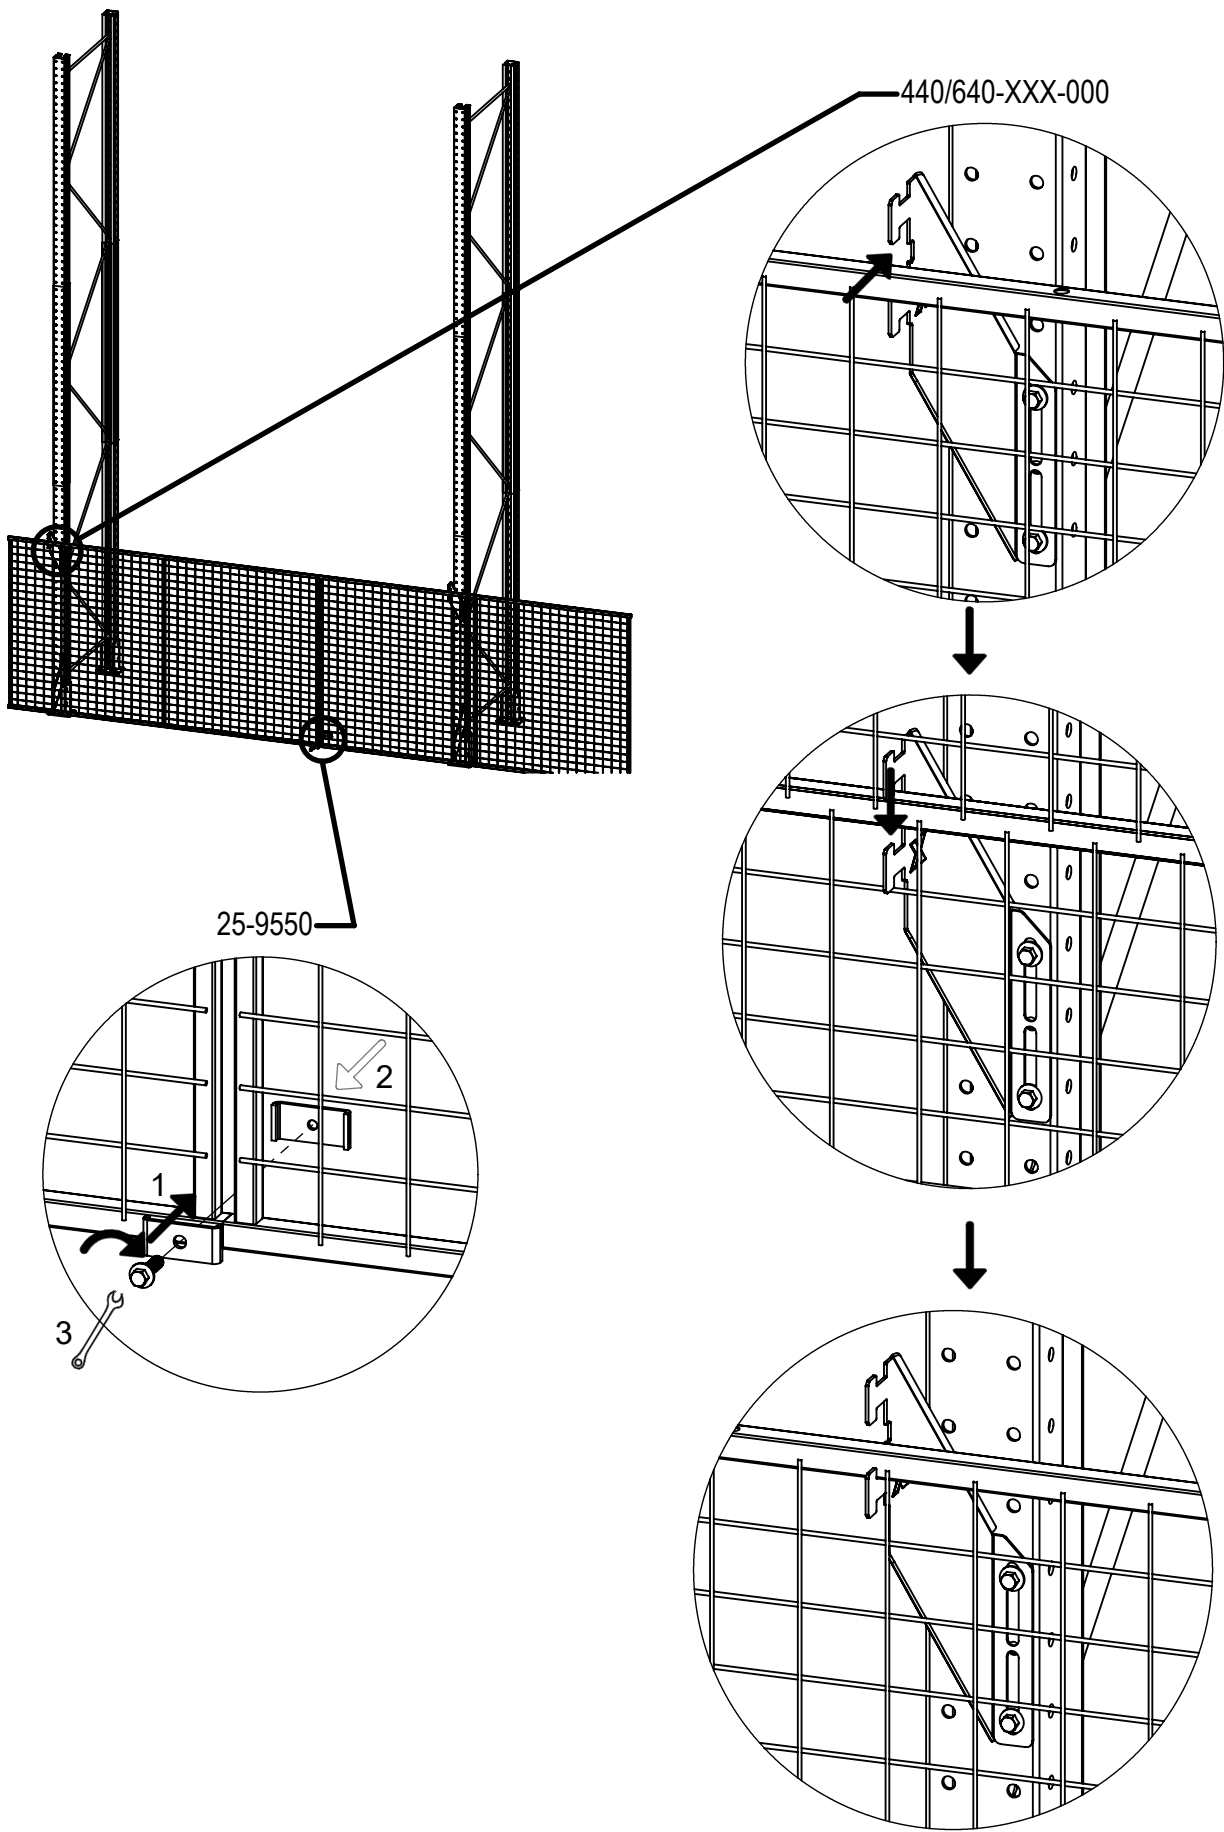


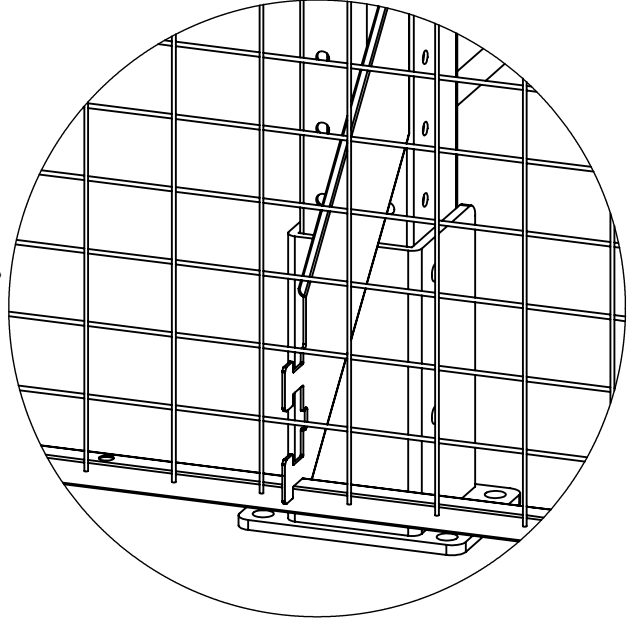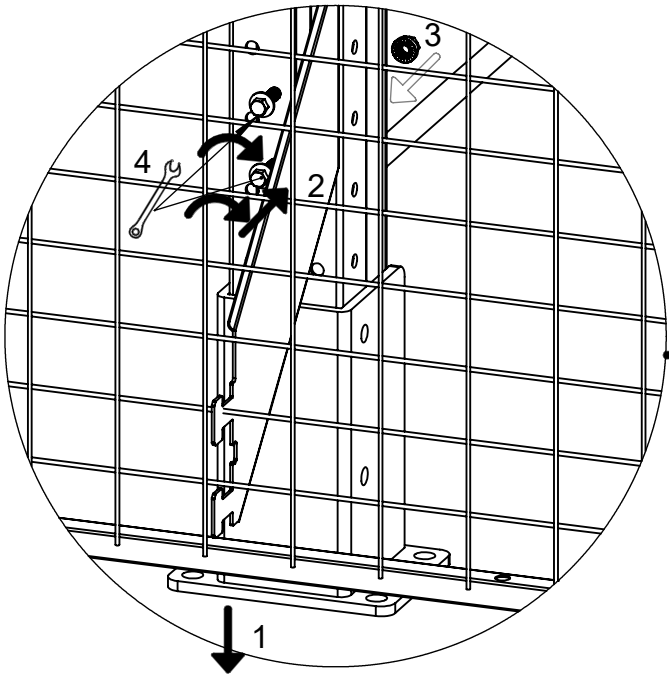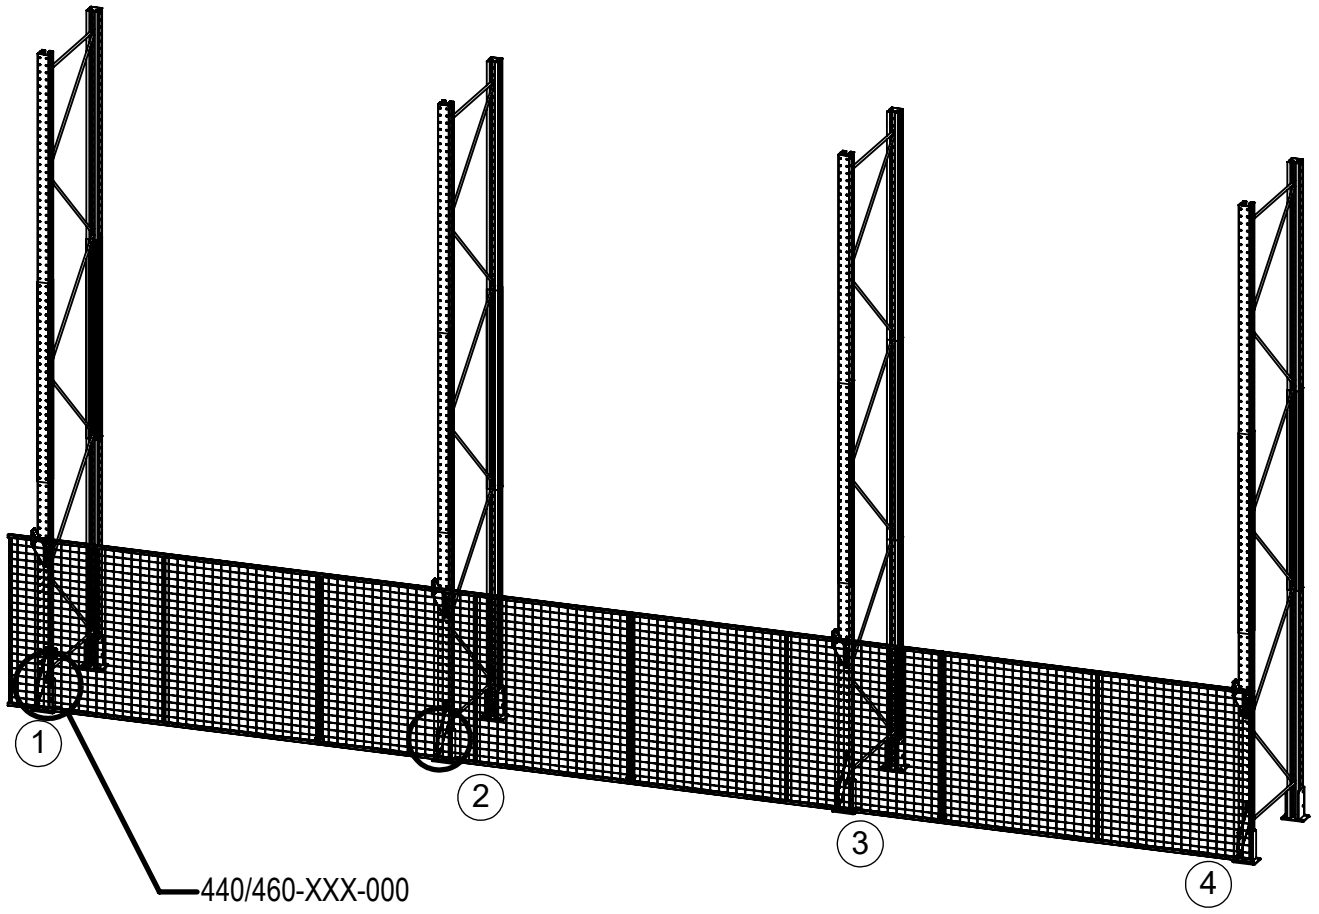

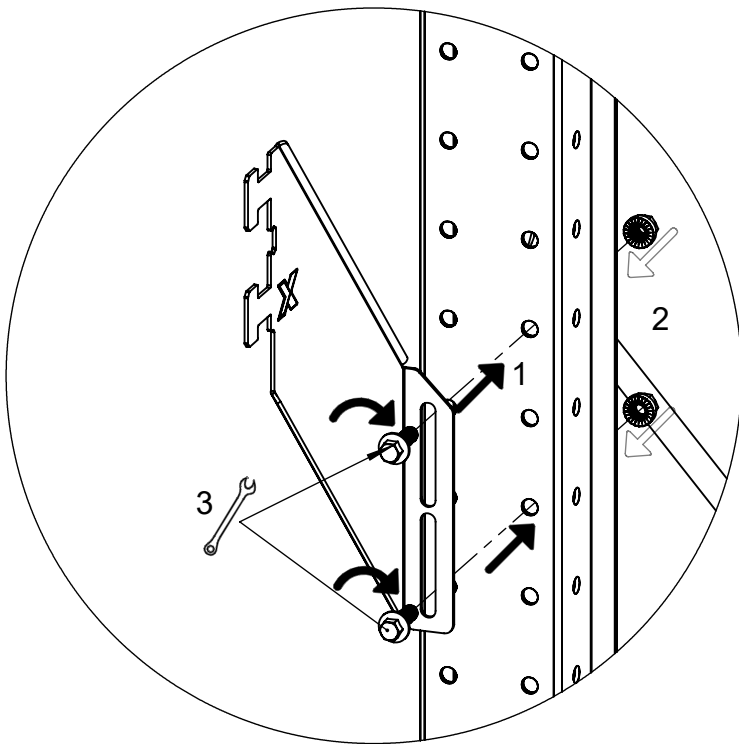
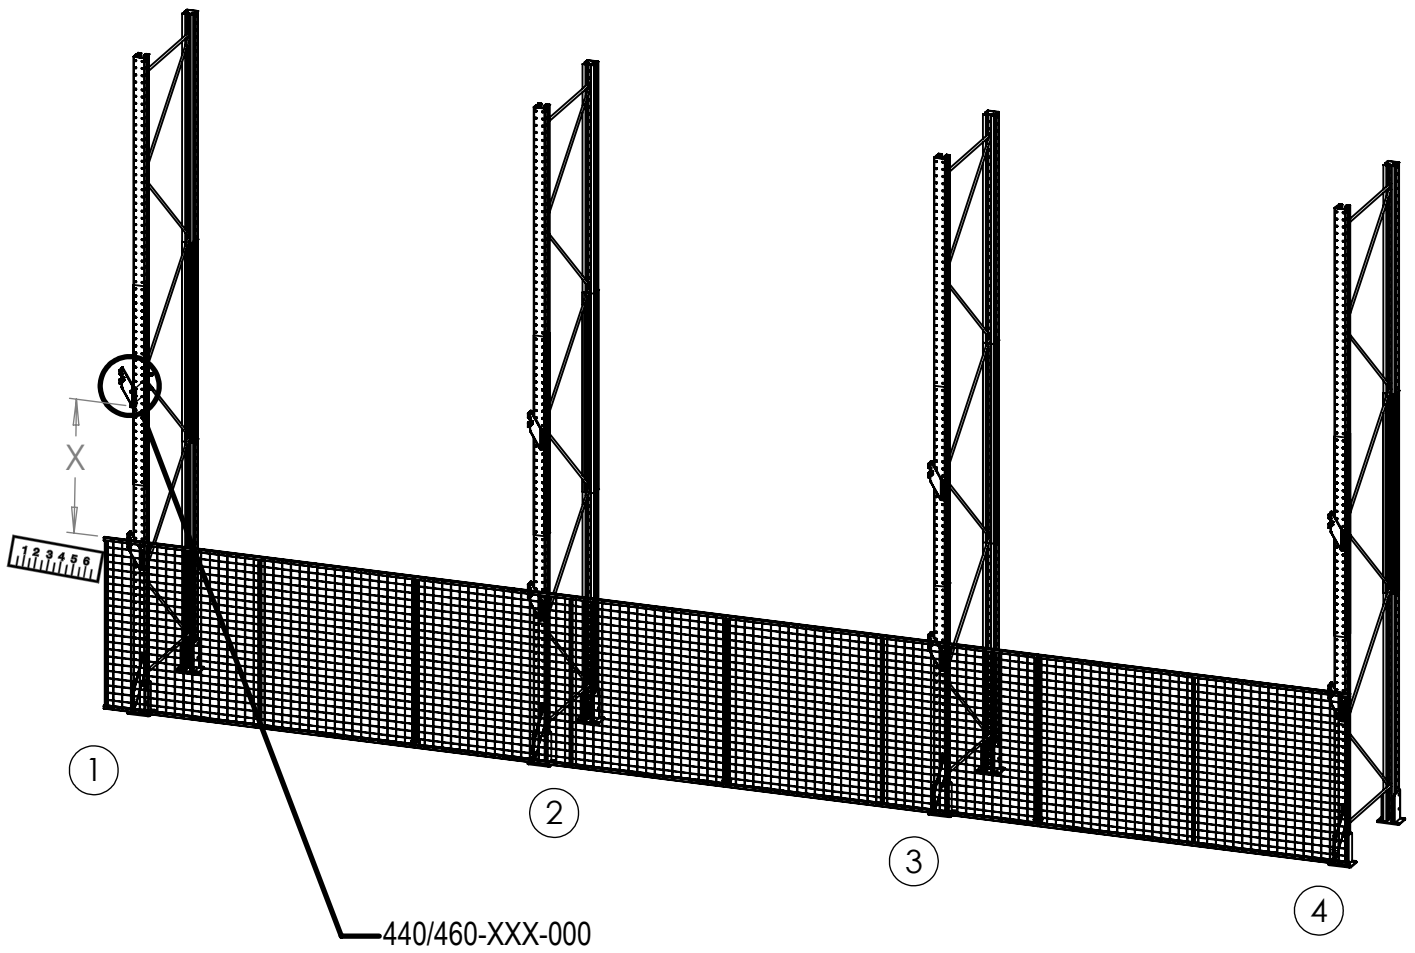


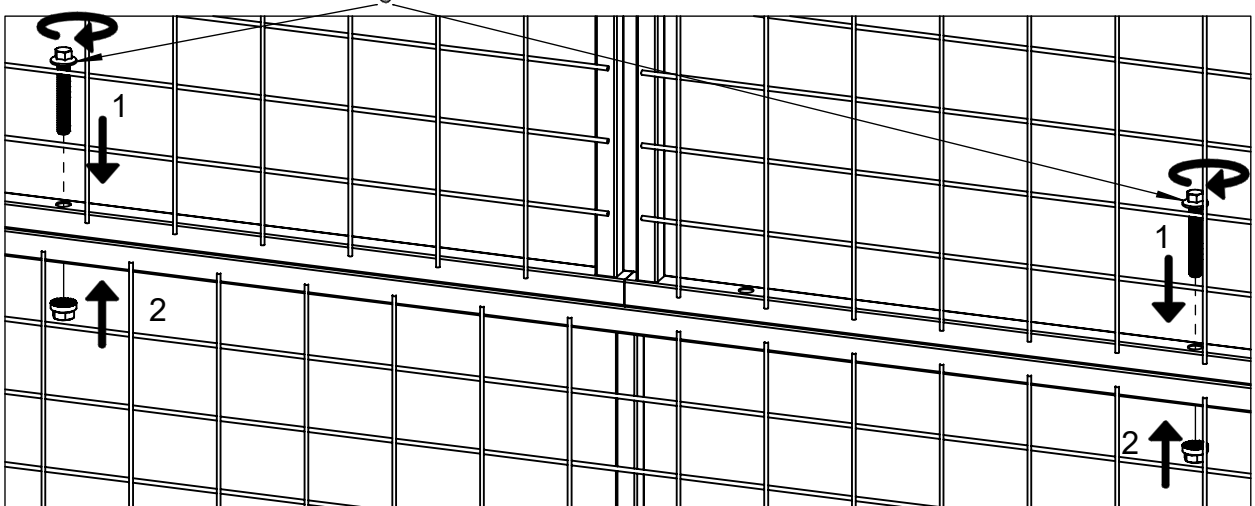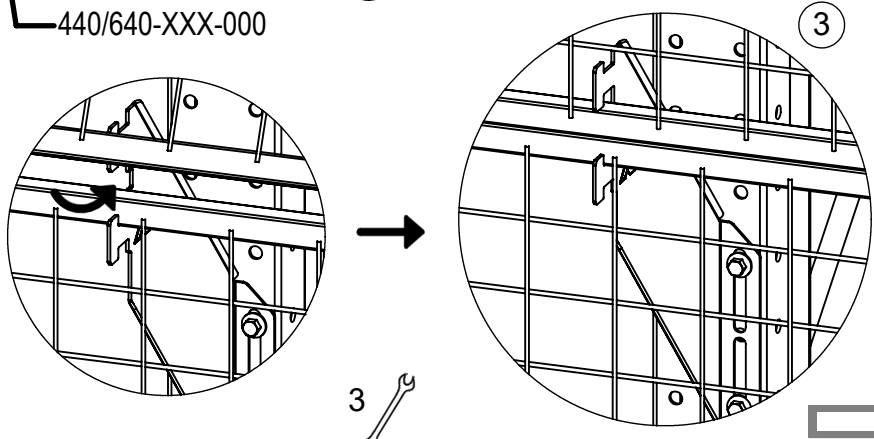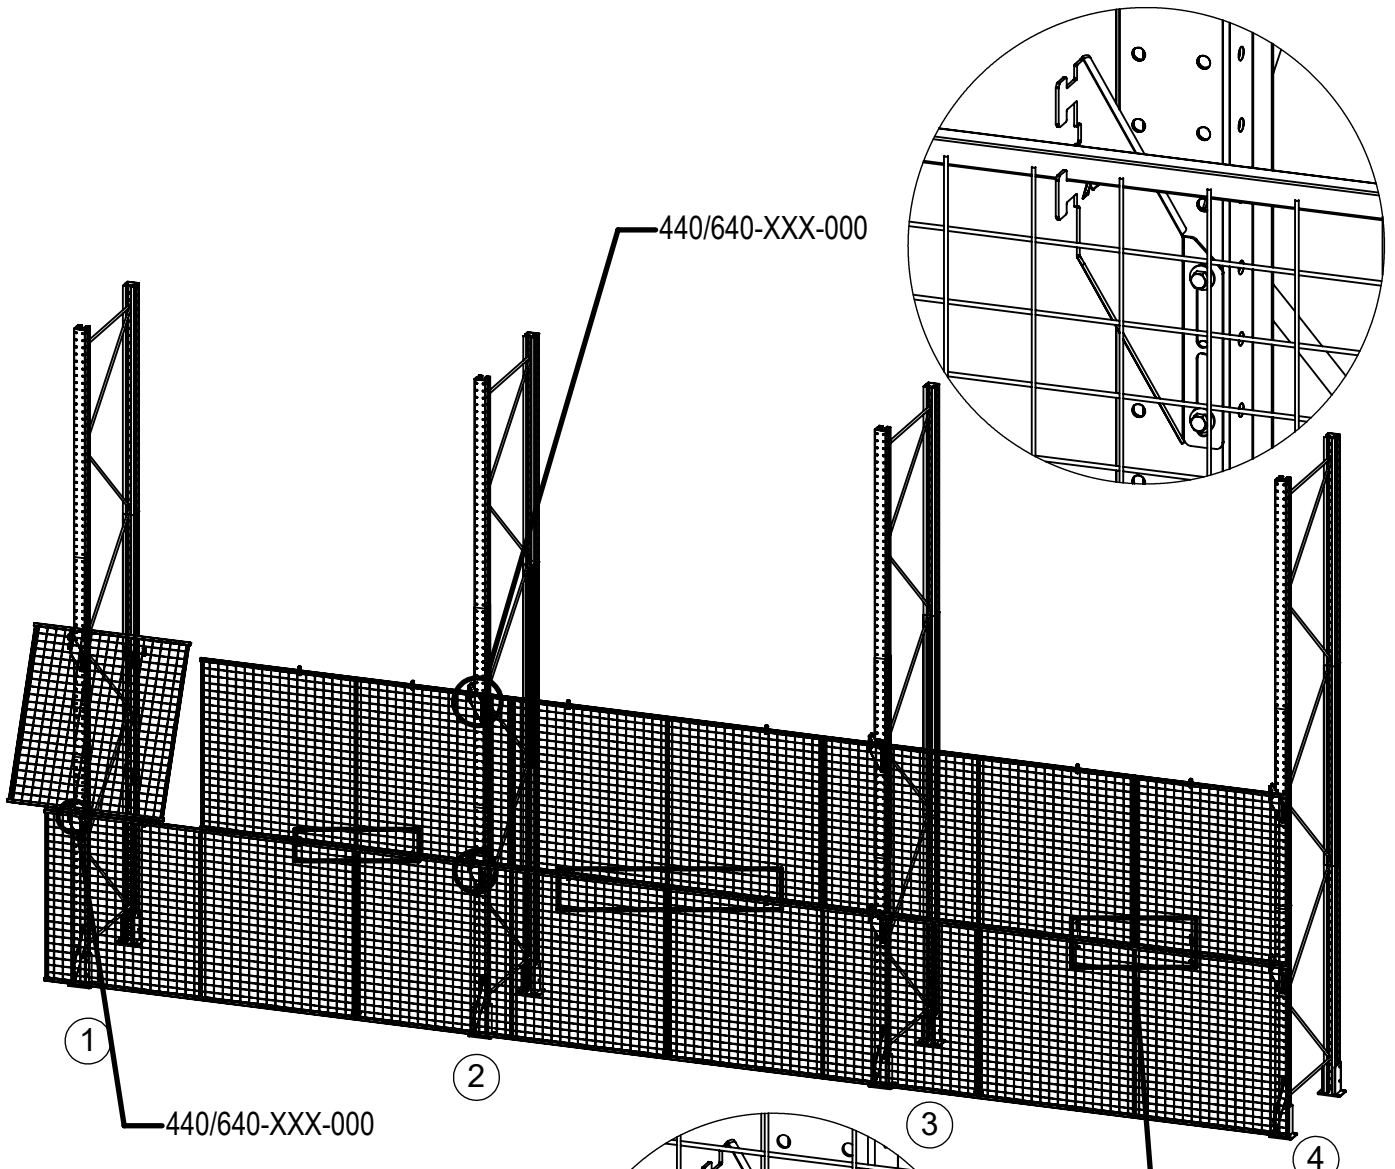

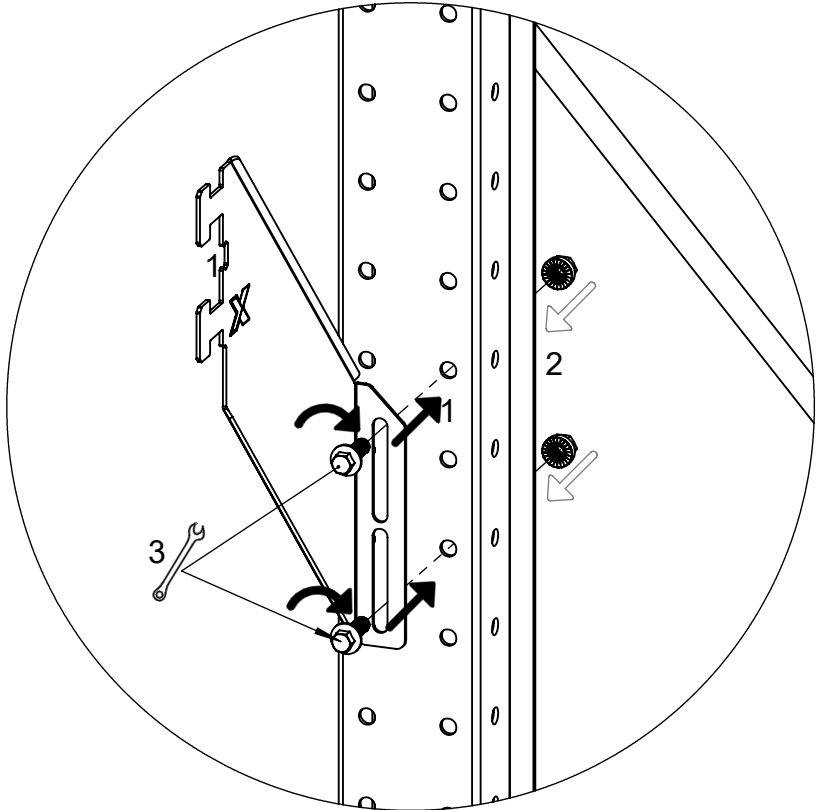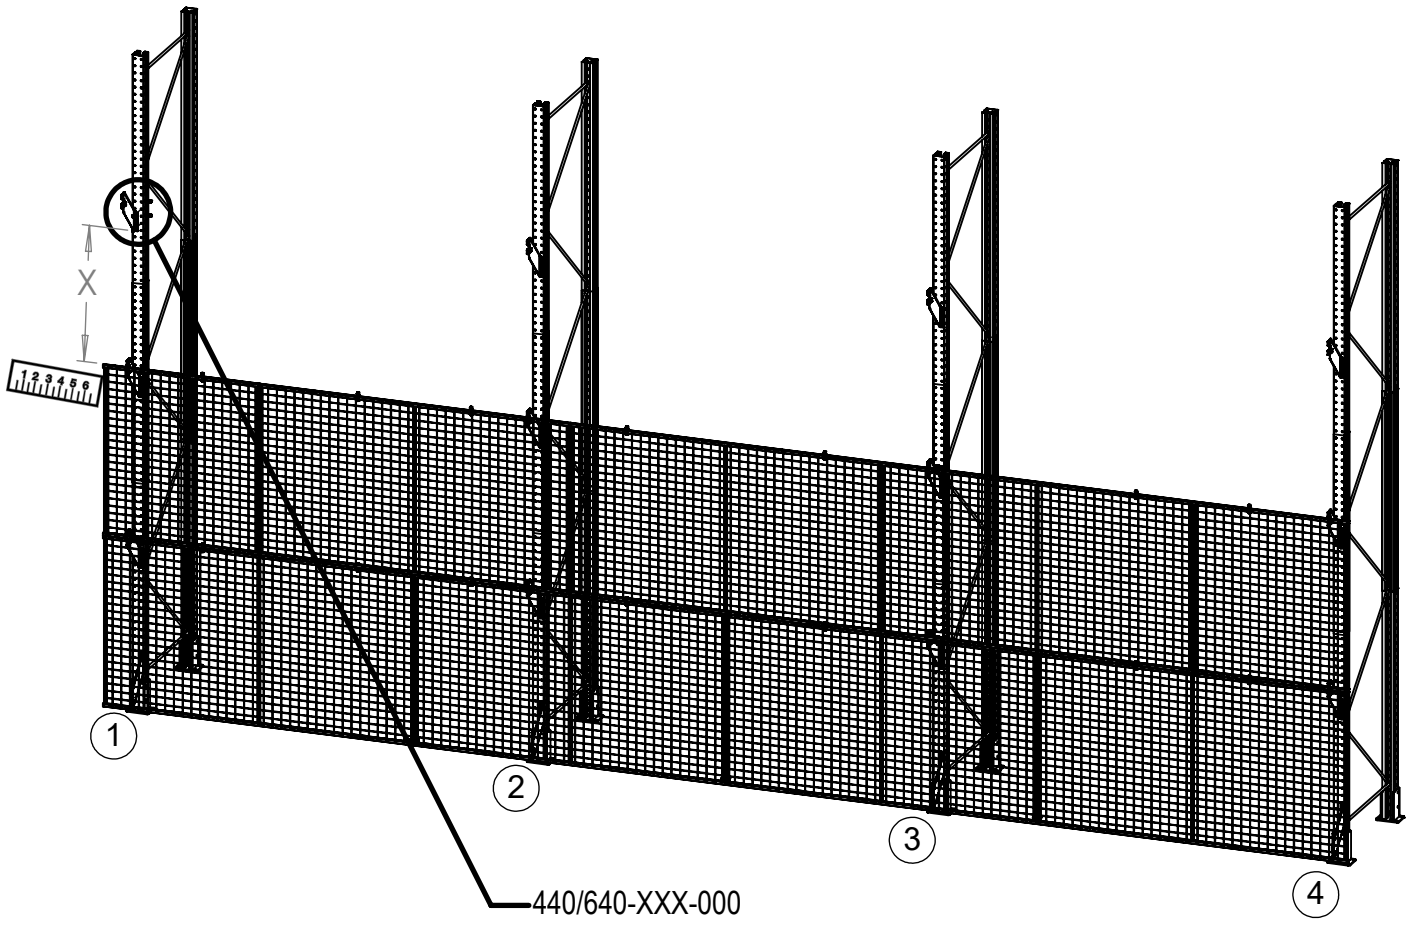

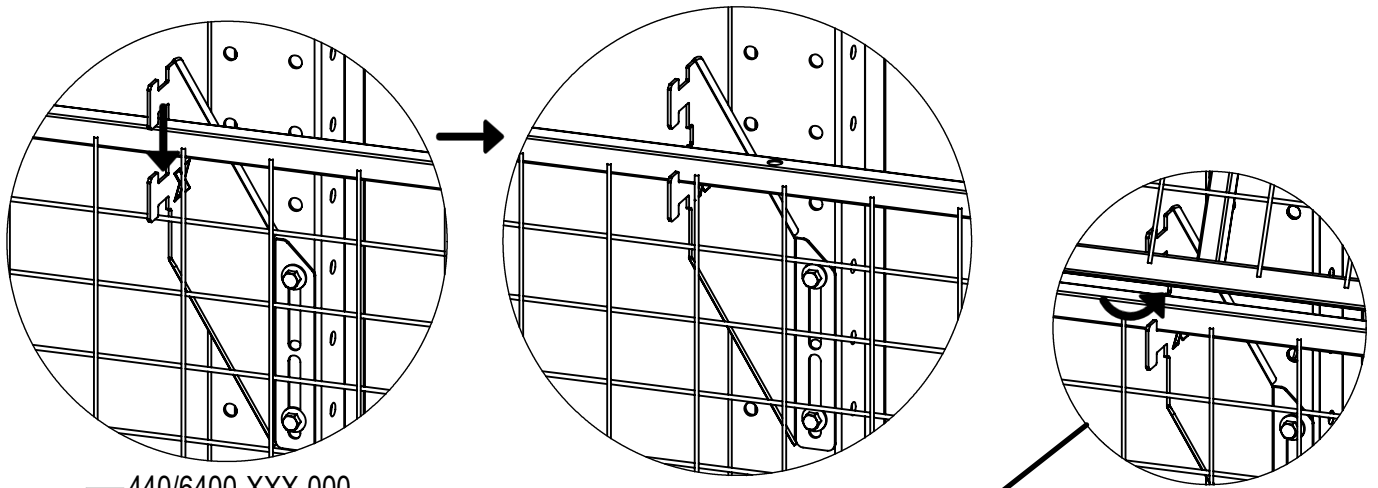






440/6400-XXX-000



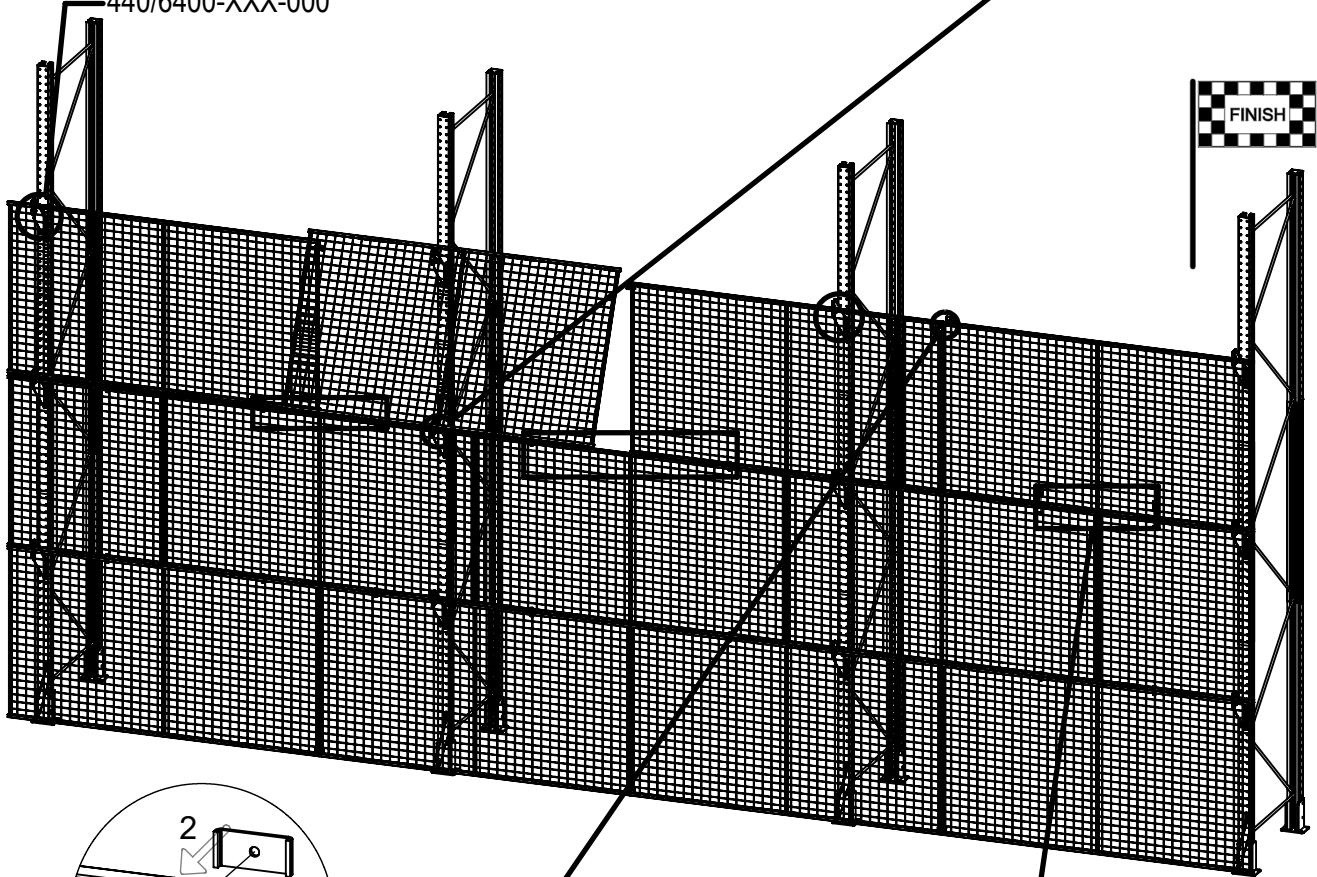









25-9550


21-2301S

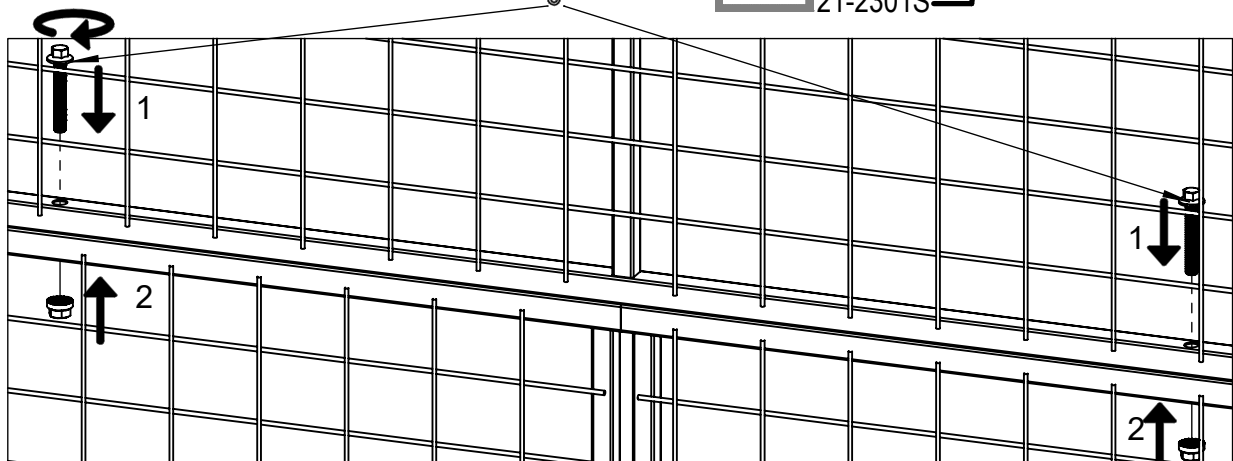

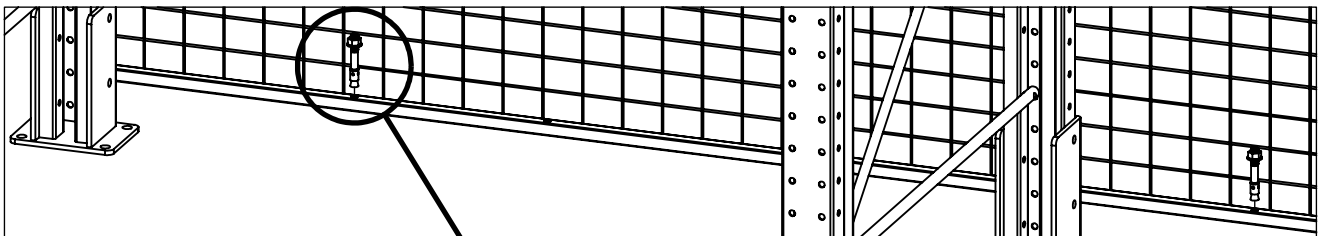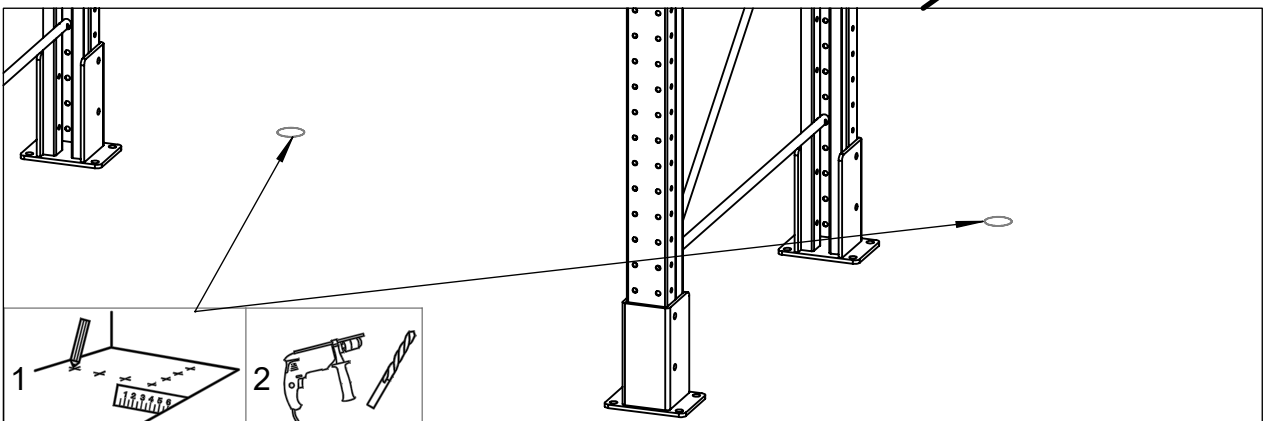
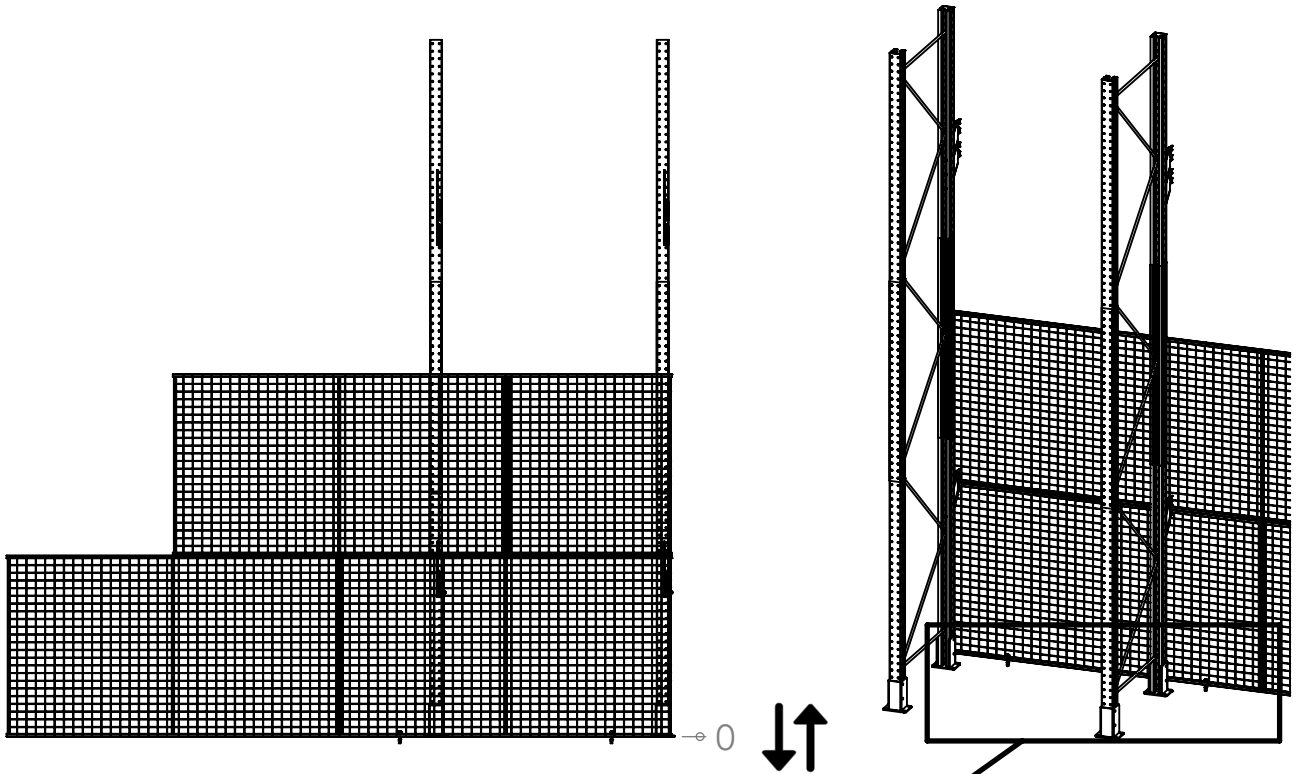


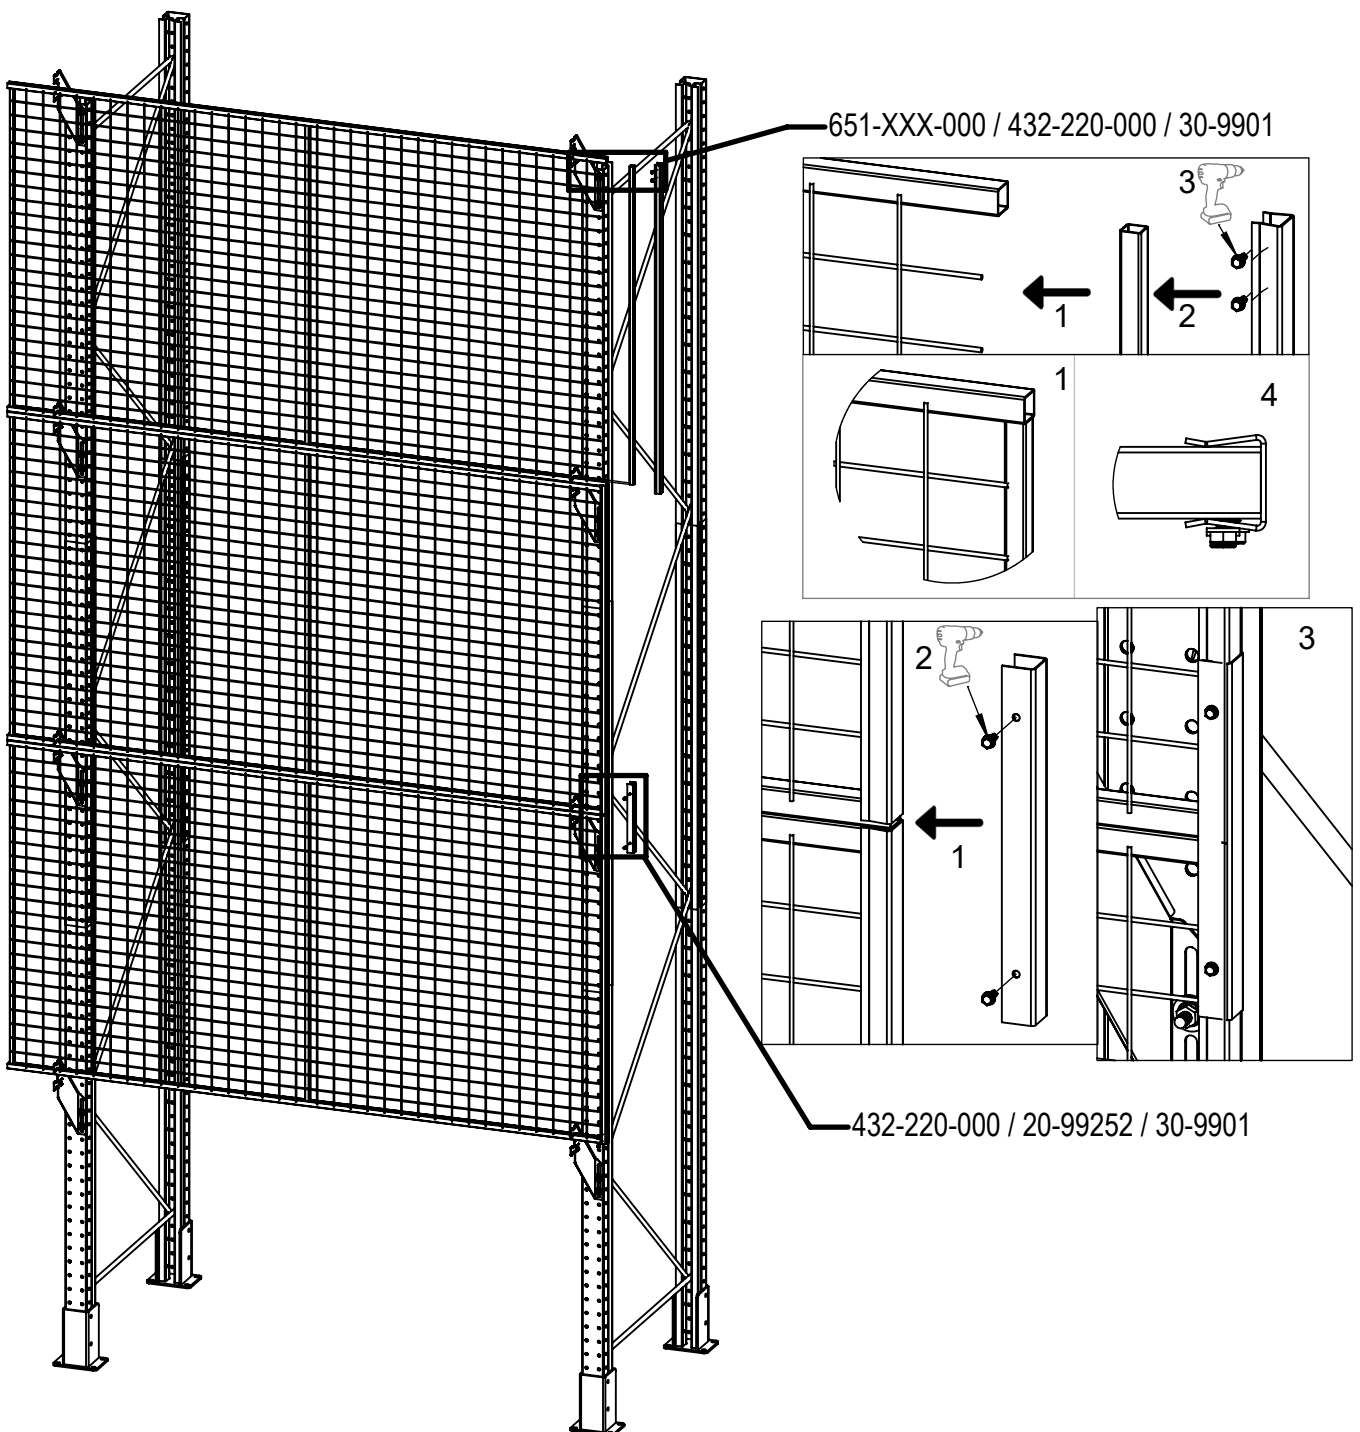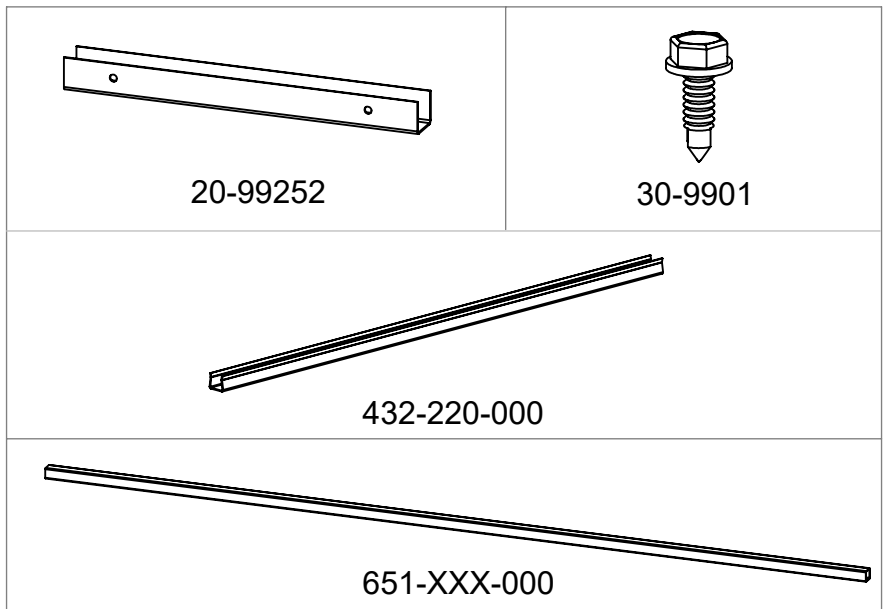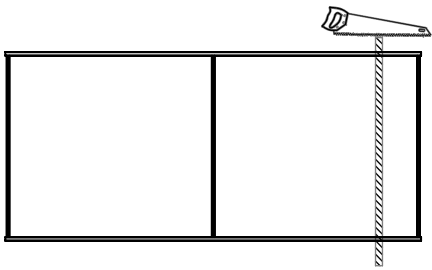

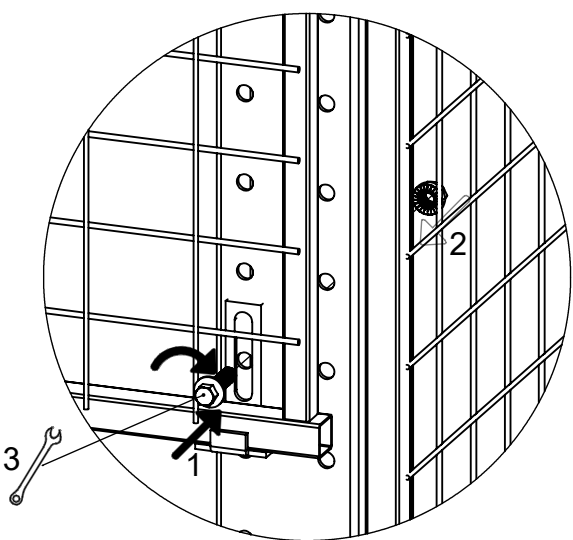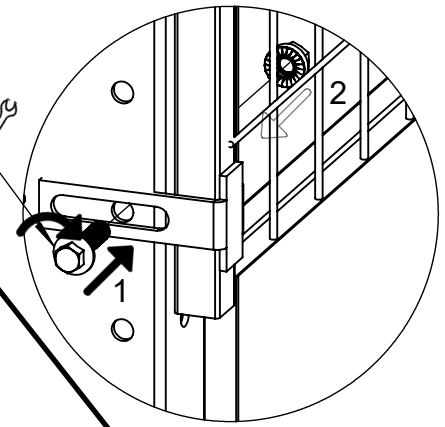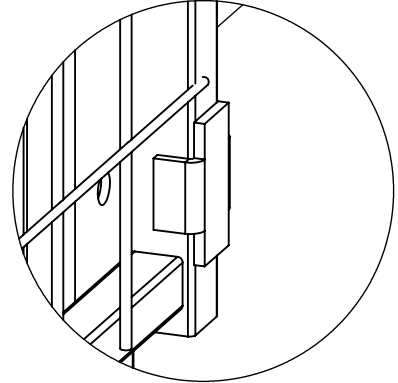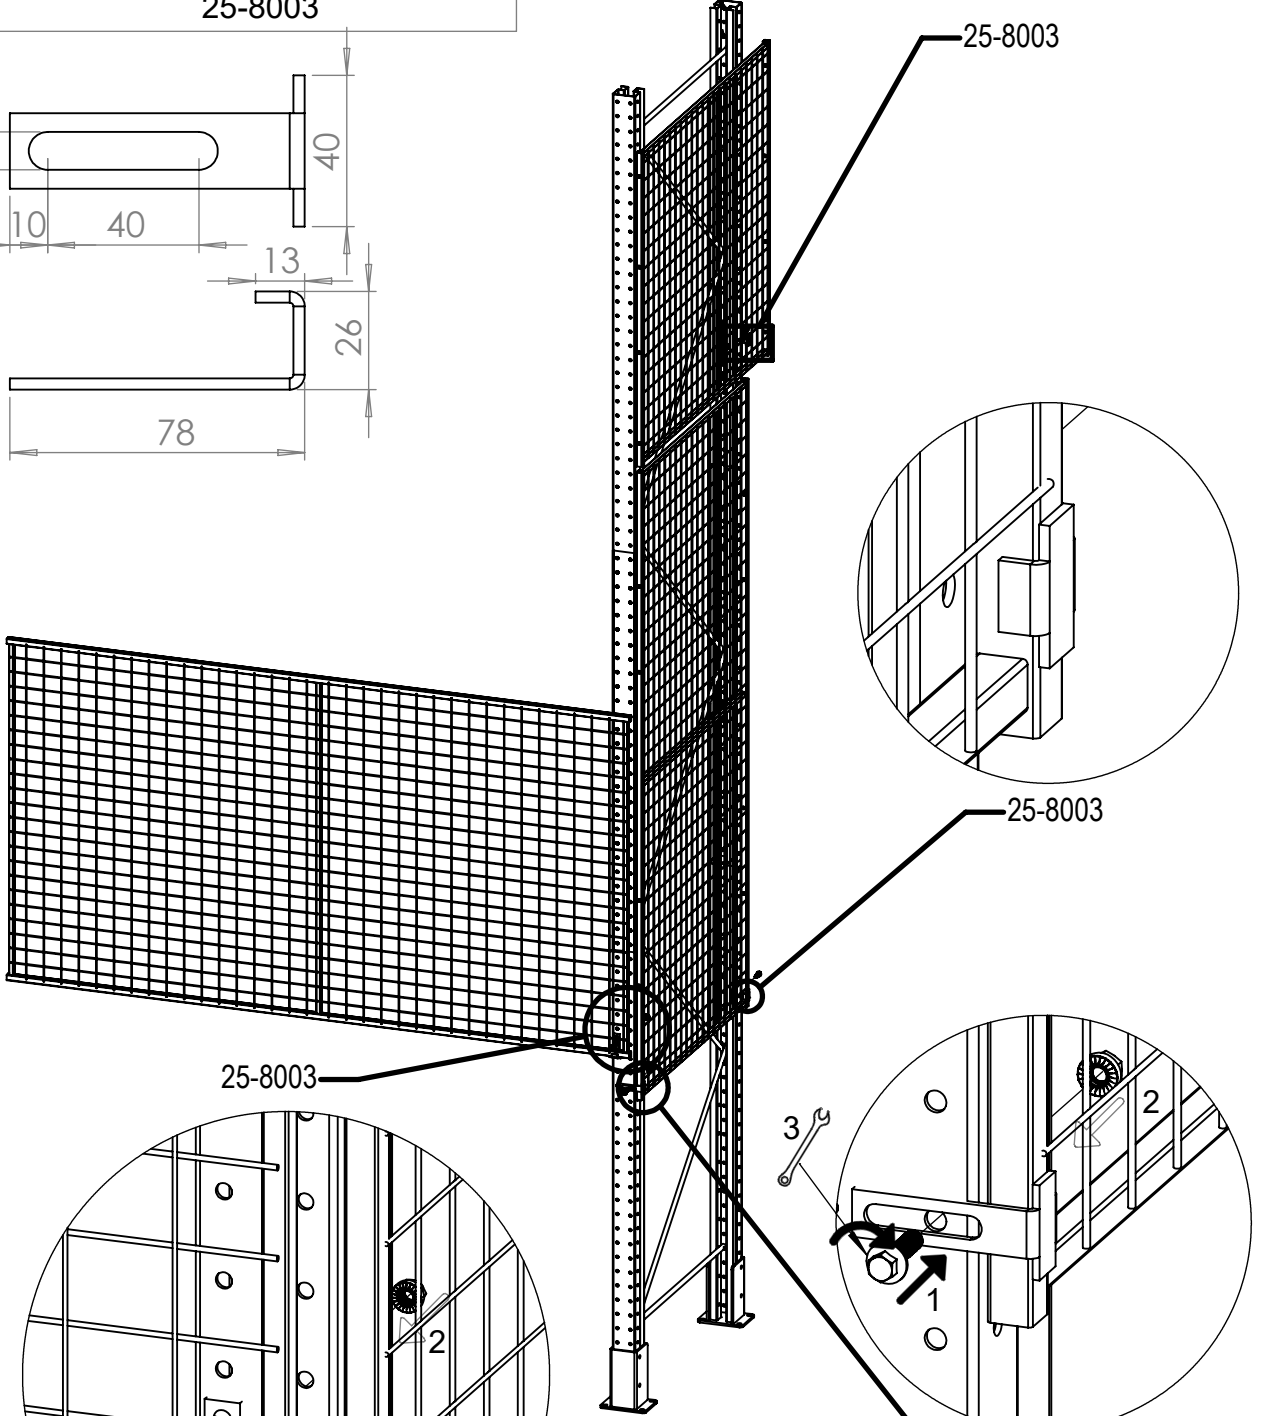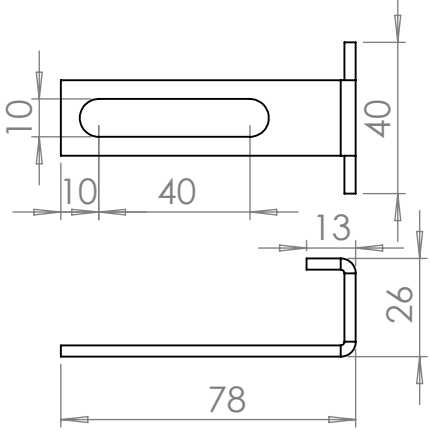
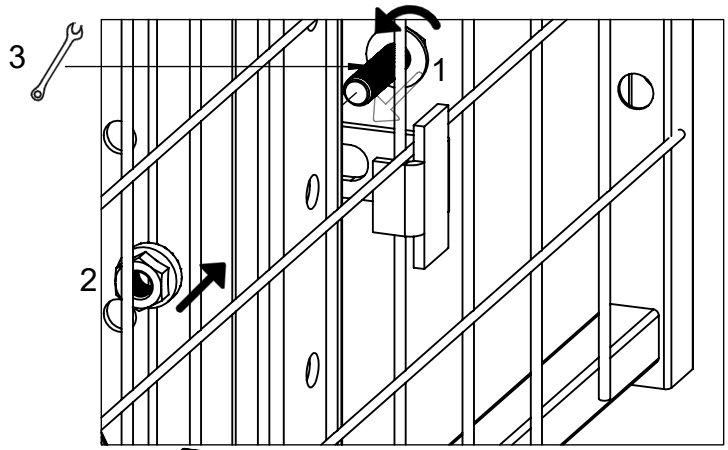
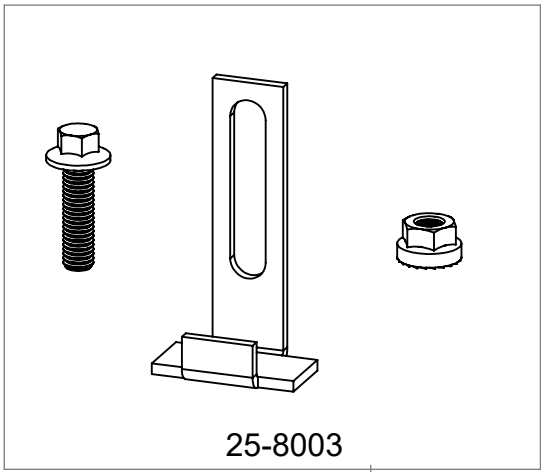


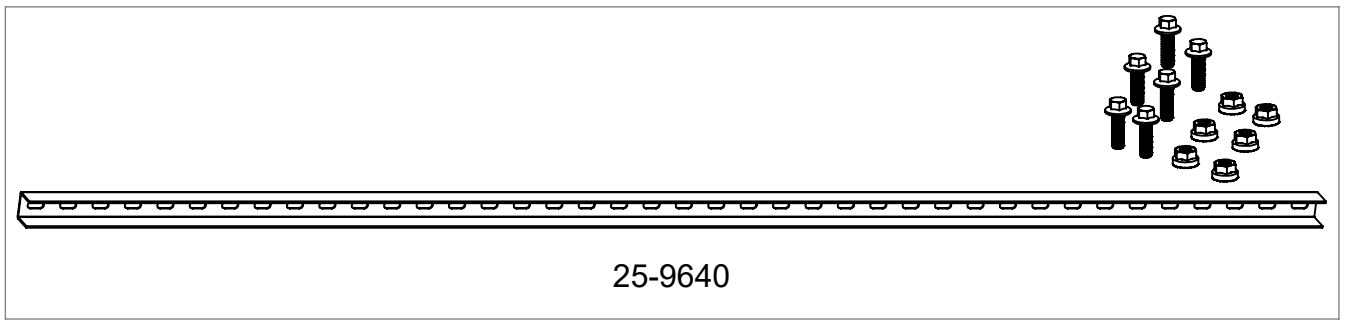


440/640-XXX-000 / 25-9640

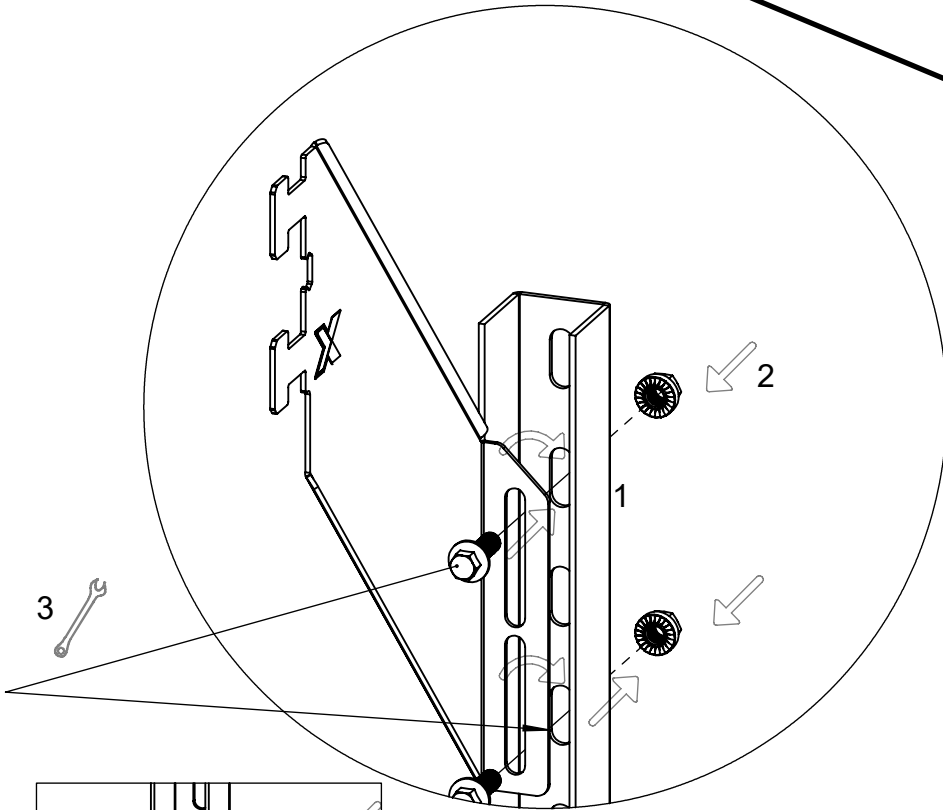

Max 1500 mm

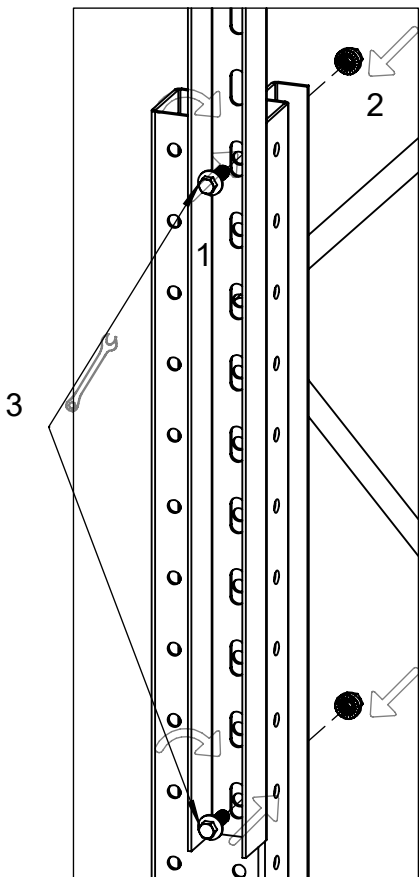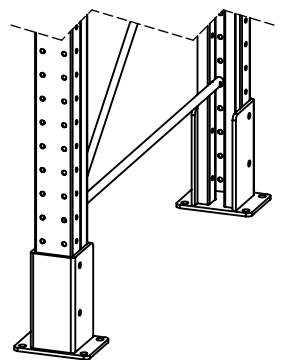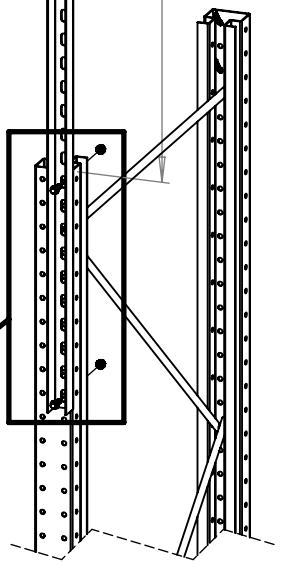

25-9640

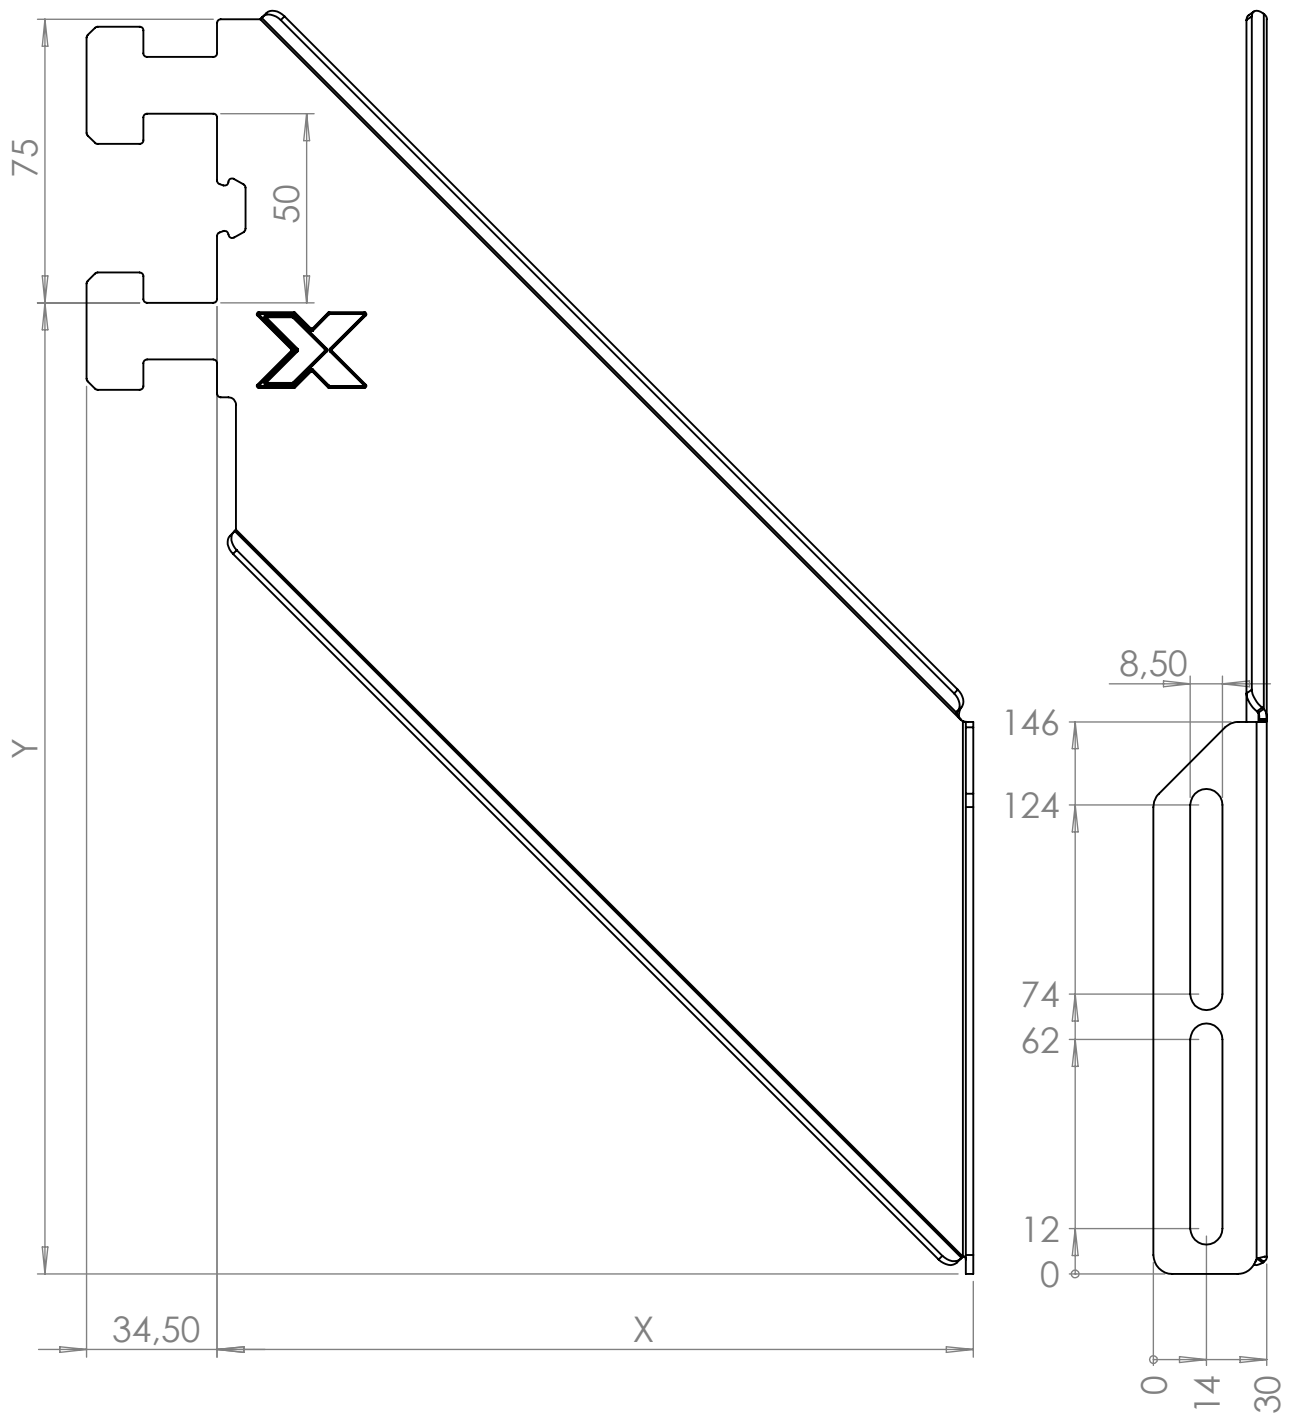

Art No.	X(mm)	Y(mm)	Material thickness
440/640-050-000	50	107	2
440/640-100-000	100	157	2
440/640-125-000	125	182	2
440/640-150-000	150	207	2
440/640-175-000	175	232	2
440/640-200-000	200	257	2
440/640-250-000	250	306	3
440/640-300-000	300	356	3